




DIM BAR SDM-110

Ordering code: SDM110

DIM BAR® SDM-110 is versatile, adaptable, yet low cost and easy to use dimming module designed for electrical energy savings in the indoor and outdoor lighting applications, offering low investment demands and quick payback. Thanks to its small size, DIM BAR® is capable to be placed inside basically any luminaire equipped with an LED driver.

Feature

- ✓ Powerline Communication QM-50-SSI1
- ✓ Compatible with 0 - 10 V dimming input
- ✓ Programmable dimming sequence
- ✓ Interior and exterior use
- ✓ Compatible with most LED drivers

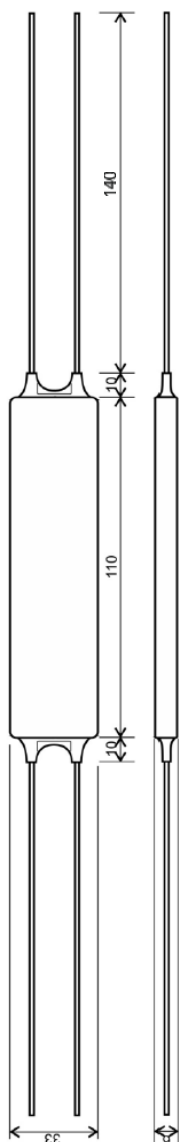

Parameter	Features
Input voltage	AC 220 V ~ 240 V; 50 Hz
Consumption	0,25 W
Communication interface	Powerline QM-50-SSI1
Output	0-10 V
Safety class	II.
IP Rating	IP54
Dimensions (LxWxH)	110x33x6 mm
Weight	37 g
Operating ambient temperature	-40 °C ~ +75 °C
Maximum cross section	0,5 mm ² solid
Standards	EN 61 347-1, EN 61 347-2-11, EN 55 015, EN 61 000-3-2, EN 61 547, EN 61 000-3-3

Wiring diagram

